Free Standing Cabinets



Width: 800 mm Depth: 1000 mm

Static Load Capacity Enhanced (E)





DYNAmic Series Networking Enclosures, with 19" w:800 mm and d:1000 mm physical sizes, with max internal usable depth and 3 different heights.

All w:800 mm model cabinets are constructionally proper for the vertical cable management systems. The Lande 800 wide segment designed with highly efficient and customer friendly vertical cable anagement channel.

Please see door options in page 5 and 6.

Etatid Candacity Gto Gtong dard

U Height: 42U, 45U, 47U

Standards and Compliances:



ISO 9001 Quality Management System

EN 61587-1 Mechanical Structures for Electronic Equipment IEC 297-1, 19" Mounting IEC 297-2 Overall Cabinet Dimensions EN/IEC 60529- IP20 Ingress Protection performance EN/IEC 62262- IK07 Mechanical **Impact Resistance** CE conform to



EN 60950-1 Information Technology Equipment, Safety, Part-1: General Requirement ΕN IEC 62368-1 Audio/Video, Information and Communication Technology Equipment Part 1: Safety requirements UL listed to



UL 2416, Outline of Investigation for Audio/Video. Information Communication Technology Equipment Cabinet, Enclosure and Rack Systems; UL 60950-1 and CSA C22.2 NO. 60950-1-07, Information Technology Equipment Safety Part 1: General Requirements Environment Friendly;



ISO 14001 Environmental Management System RoHS compliancy %100 Recyclable Material

Standard Color:



RAL 7035 Light Grey




RAL 9005 Black



19" DYNAmic Free Standing Cabinets


Width: 800 mm Depth: 1000 mm


Exploded View

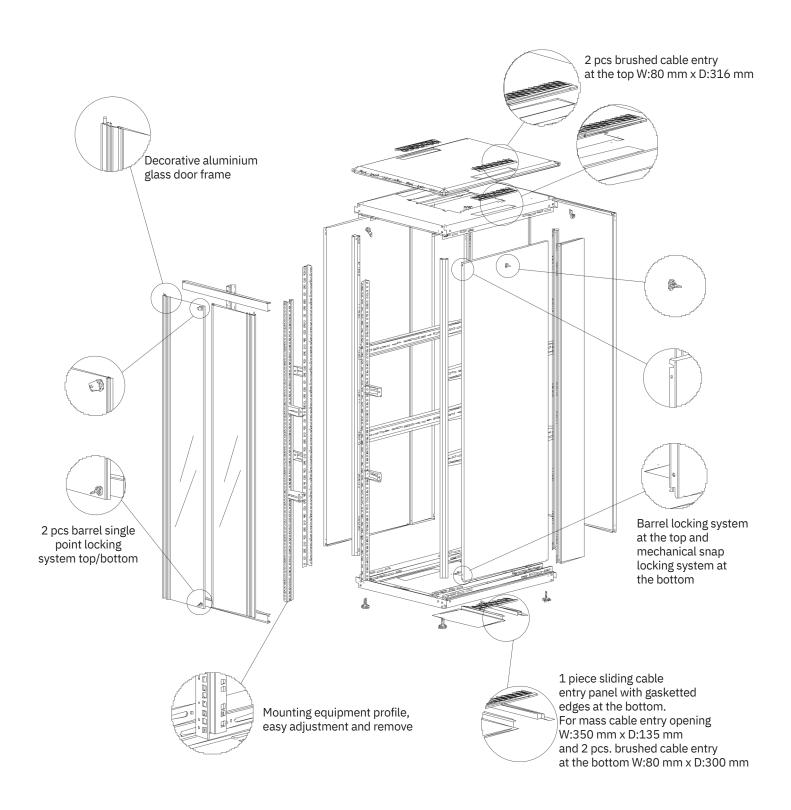



Free Standing Cabinets

Construction Drawing




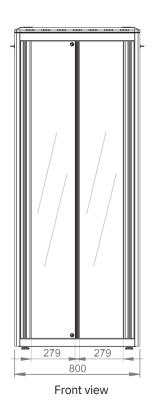

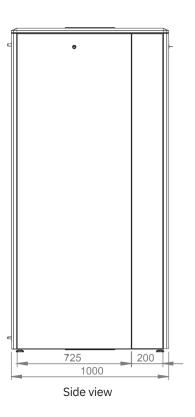

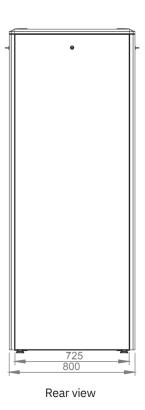


Width: 800 mm Depth: 1000 mm




19" DYNAmic Free Standing Cabinets

Width: 800 mm Depth: 1000 mm


Construction Drawing




Dimensions in width and height



Isometric view





	h	Н
42 U 45 U 47	1867 mm 2000 mm 2089 mm	2053 mm 2187 mm 2276 mm

19" DYNAmic Series Free Standing Cabinets W=800 mm D=1000 mm																
Product Number***	Product Description	Size WXDXH mm	h Size in U	h in mm	*H mm, overall without feet and/or castor	Width Overall mm	Width Rail to Rail	Depth Overall mm	**Depth Shipping Conf. Rail to Rail mm	QTY IN PACKAGE	PACKING DIMENSIONS WXDXH mm	Standard NET Weight of Product kgs	Product kgs Gross Weight of	QTY IN PALLET	PALLET DIMENSIONS WXDXH mm	Pallet Weight kgs
LN-FS42U8010-CC-EAAA	42U 19" Free Standing Cabinet W=800 mm D=1000 mm	800x1000x2053	42U	1867	2053	800	19	1000	770	1	880x1080x2193	118	136,7	1	880x1080x2193	136,7
LN-FS45U8010-CC-EAAA	45U 19" Free Standing Cabinet W=800 mm D=1000 mm	800x1000x2187	45U	2000	2187	800	"	1000	770	1	880x1080x2327	123,5	142,7	1	880x1080x2194	142,7
LN-FS47U8010-CC-EAAA	47U 19" Free Standing Cabinet W=800 mm D=1000 mm	800x1000x2276	47U	2089	2276	800	19	1000	770	1	880x1080x2416	131	150	1	880x1080x2416	150

^{***}Cabinet nominal load capacity is 600 kgs. as per UL 2416 safety mark. However project case we configure the rack up to 1000 kgs. of load capacity with additional suport barsthicker 19" rails with 2 mm thickness, please add E (Enhanced notification defining load capacity requirement is up to 1000 kgs.) at the end of part number. Example LN-FS42U8010-BL-EAAA-E.



^{*} Please add 30 mm to H mm once used with leveling feet, add 80 mm to H mm once used with castor set.

** See min and max adjustable depth variations on drawings.

***CC= LG for Light Grey RAL 7035 & BL for Black RAL 9005 for customers to define while ordering, for "EAAA" selection please see the door options.

Free Standing Cabinets Door Options







Width: 800 mm Depth: 1000 mm























Free Standing Cabinets

Door Options









Width: 800 mm Depth: 1000 mm









