


19" DYNAmax

Free Standing Server Cabinets

Exploded View

Width: 800 mm

Depth: 1000 mm

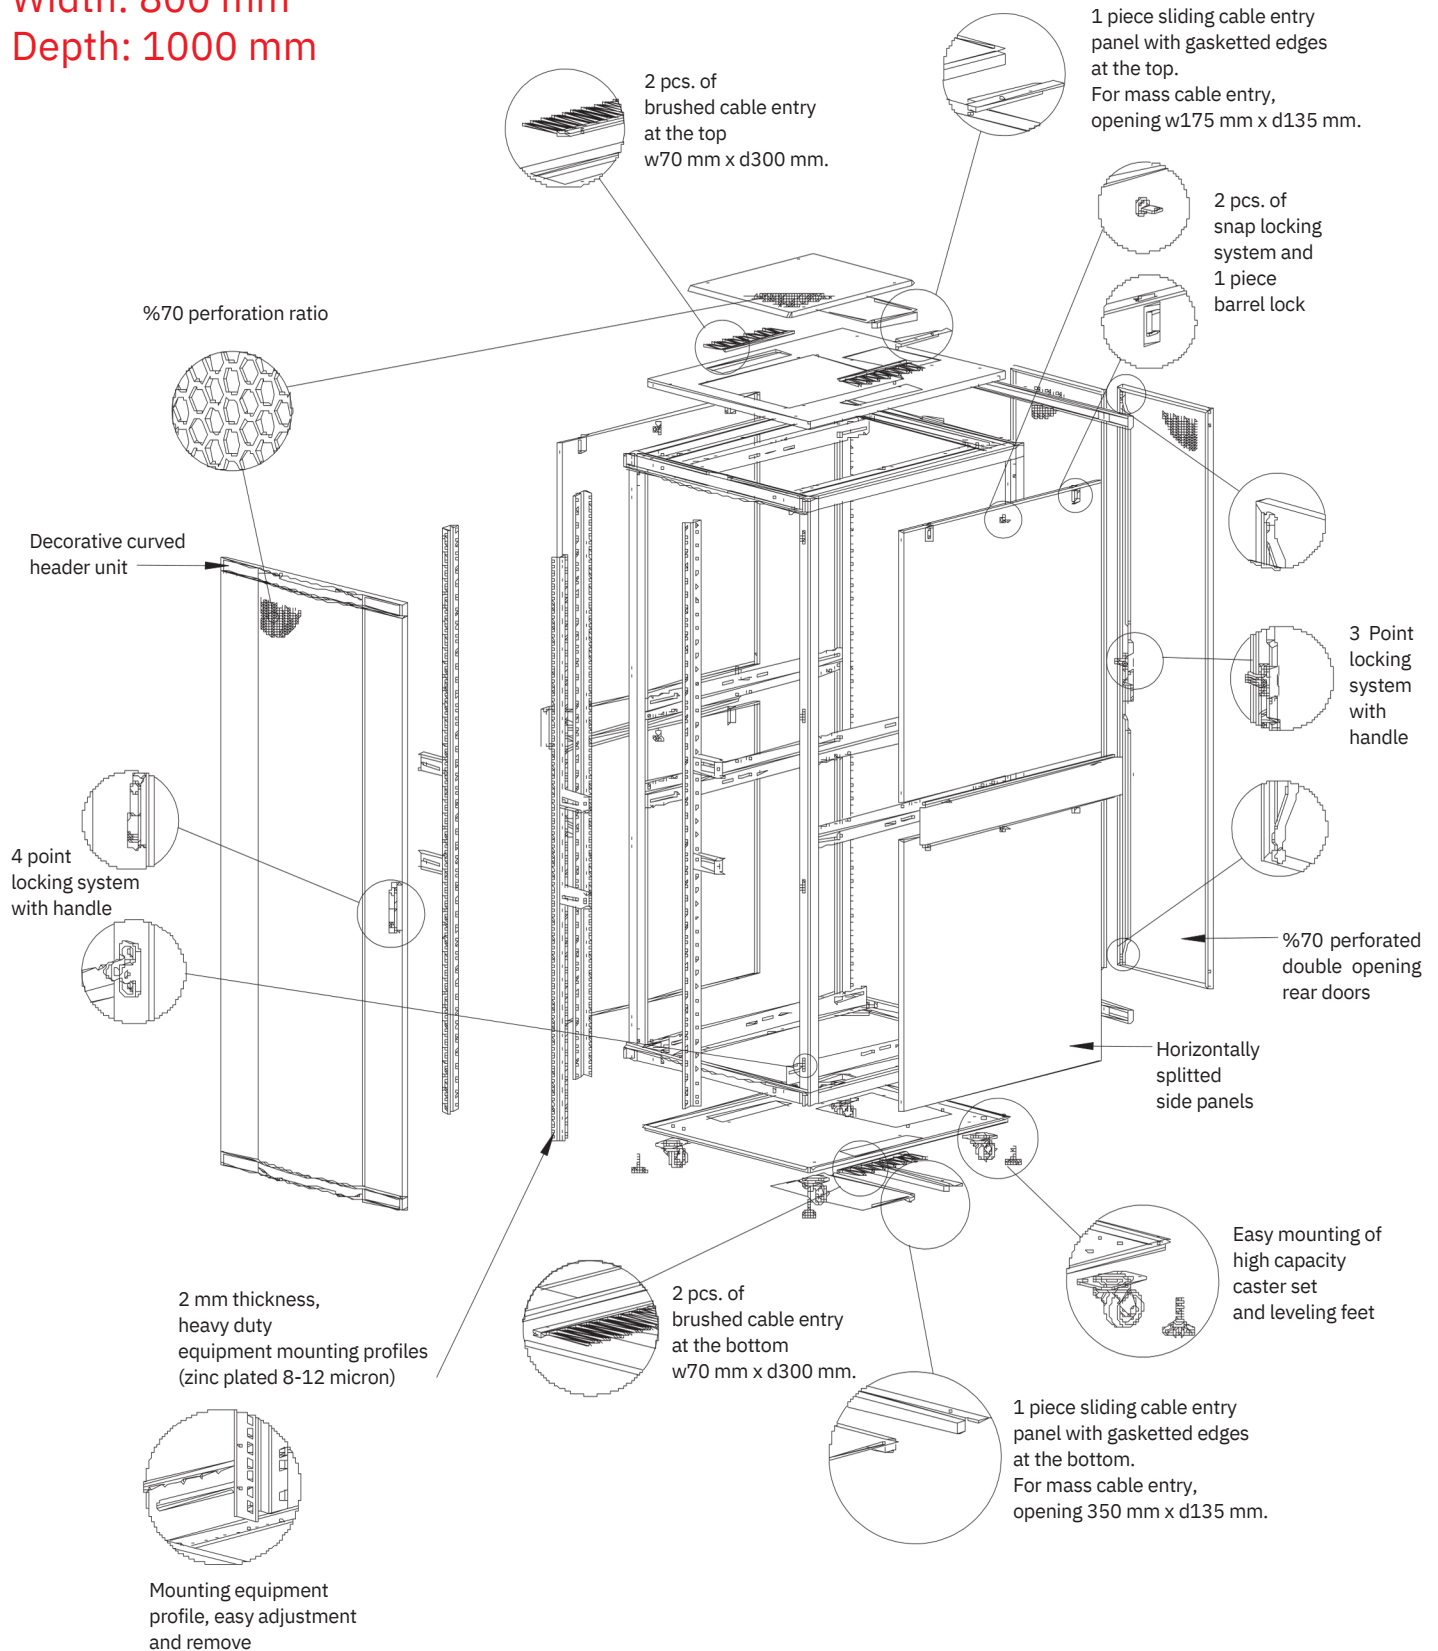


19" DYNAmax


Free Standing Server Cabinets

Construction Drawings


Width: 800 mm
Depth: 1000 mm

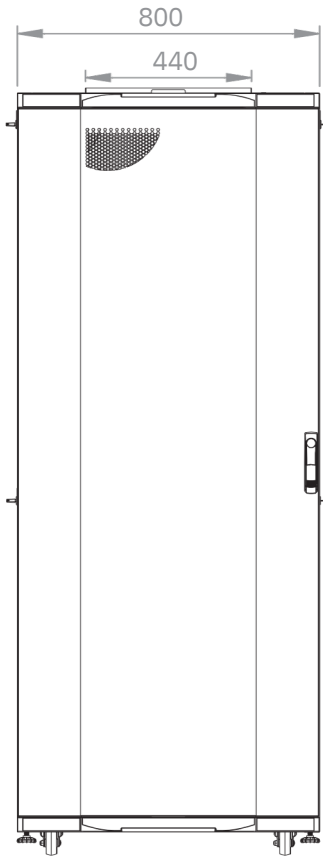

Front view

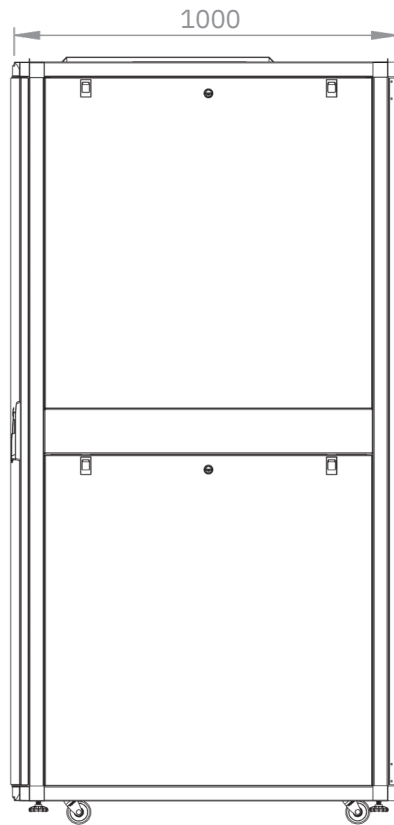

Side view

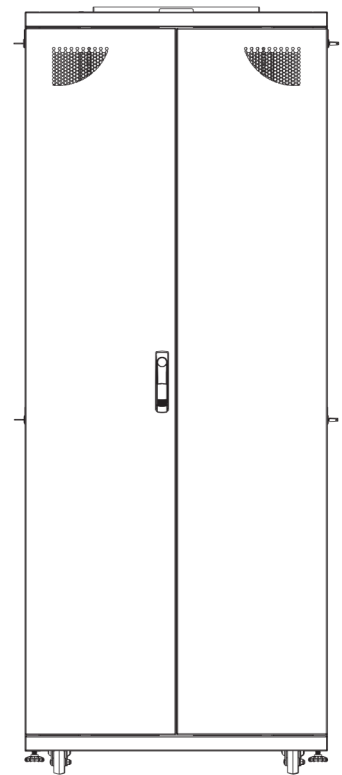

Rear view

19" DYNAmax Series Free Standing Server Cabinets W=800 mm D=1000 mm

Product Number***	Product Description	Size WxDxH mm	h Size in U	h in mm	*H mm, overall without feet and/or castor	Width Overall mm	Width Rail to Rail	Depth Overall mm	**Depth Shipping Conf. Rail to Rail mm	QTY IN PACKAGE	PACKING DIMENSIONS WxDxH mm	Standard NET Weight of Product kgs	Product kgs Gross Weight of	QTY IN PALLET	PALLET DIMENSIONS WxDxH mm	Pallet Weight kgs
LN-SR36U8010-CC-CFAA	36U 19" Free Standing Server Cabinet W=800 mm D=1000 mm	800x1000x1705	36U	1600	1705	800	19"	1000	720	1	880x1080x1845	117	139	1	880x1080x1845	153
LN-SR42U8010-CC-CFAA	42U 19" Free Standing Server Cabinet W=800 mm D=1000 mm	800x1000x1970	42U	1867	1970	800	19"	1000	720	1	880x1080x2100	128	148	1	880x1080x2100	162
LN-SR45U8010-CC-CFAA	45U 19" Free Standing Server Cabinet W=800 mm D=1000 mm	800x1000x2105	45U	2000	2105	800	19"	1000	720	1	880x1080x2245	137	159	1	880x1080x2245	173
LN-SR47U8010-CC-CFAA	47U 19" Free Standing Server Cabinet W=800 mm D=1000 mm	800x1000x2194	47U	2089	2194	800	19"	1000	720	1	880x1080x2334	144	166	1	880x1080x2334	180

* Please add 80 mm to H mm for combined caster and leveling feet for shipping configuration.

** See min and max adjustable depth variations on drawings.


***CC= LG for Light Grey RAL 7035 & BL for Black RAL 9005 for customers to define while ordering, for "CFAA" selection please see the door options.

19" DYNAmax


Free Standing Server Cabinets

Construction Drawings


Width: 800 mm
Depth: 1000 mm

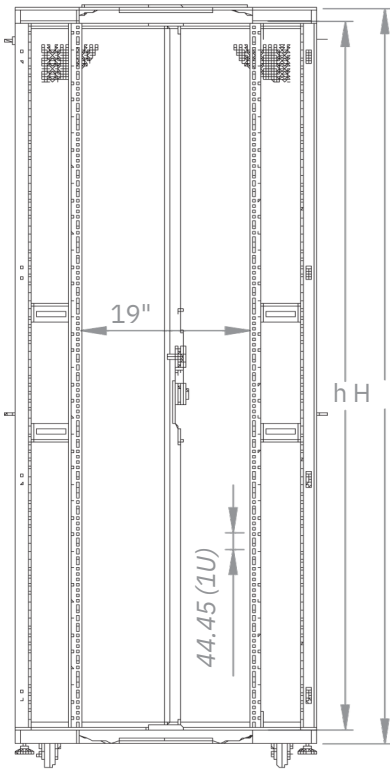


Front inside view

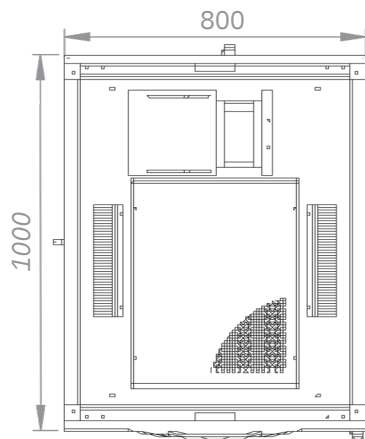


Top view

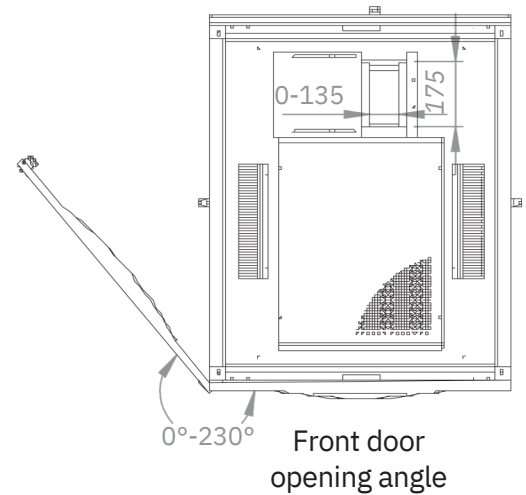

Front door opening angle

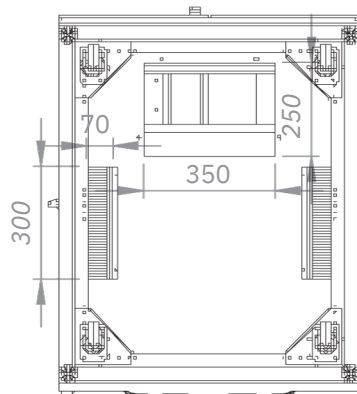

Bottom view

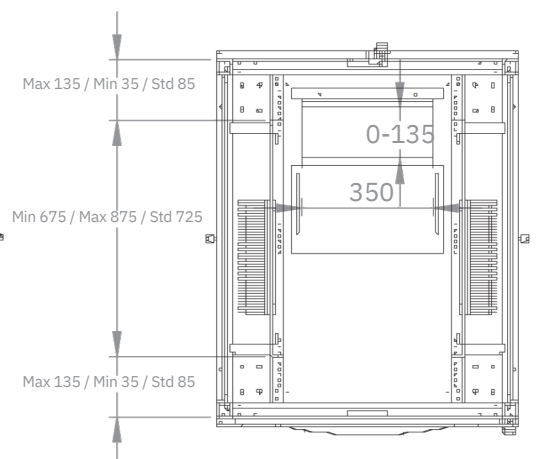

Max/Std/Min Equipment mounting Distance

	h	H
36U	1600 mm	1705 mm
42U	1867 mm	1970 mm
45U	2000 mm	2105 mm
47U	2089 mm	2194 mm

