


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REV	DATE	MODIFICATION	DRAWN
-----	------	--------------	-------

SPECIFICATIONS

- 1 ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.
INSULATION RESISTANCE: 100 M Ω.
TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.
- 2 MECHANICAL:
CABLE-TO-PLUG TENSILE STRENGTH : 20POUND MIN.
DURABILITY : 200 MATING CYCLES.
- 3 MATERIAL & FINISH:
HOUSING: POLYCARBONATE, UL94V-0
COLOR : TRANSPARENT
CONTACT BLADE: COPPER ALLOY, GOLD PLATING: 50u"
CONDUCTOR : SOLID WIRE , 23AWG, 24 AWG.
(It can be used for the wire OD from 0.096-0.102)

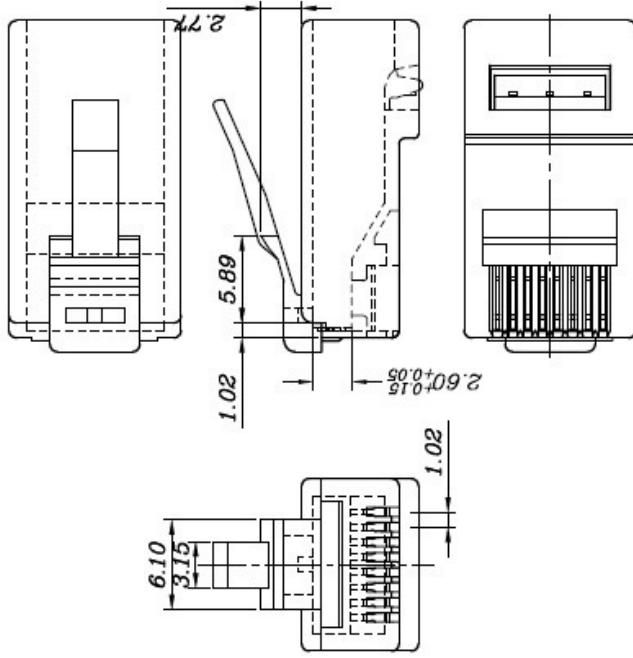

SIGNA MAX

BLADE:	E	Y	Z	A	AL	ZL	AB
Drawing							
Mark							
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	FLAT
Mark							

DRAWN BY	DATE: 2014/04/24	DESCRIPTION: RJ45 Cat 6 Plug Stranded and Solid 50 Micron 3 Prong w/Insertor
CHECKED BY	SHEET 1 of 1	ITEM NO. KRJ45/6-100
APPROVED BY	SCALE 1:1	REV. 00
	UNIT: mm	